

## ■ POLYMER ADDITIVES

# JADEWIN UV 5050H


### CHEMICAL COMPONENT

COMPONENT Alpha-Alkenes(C20-C24) maleic anhydride-4-amino-2,2,6,6-tetramethylperidine,polymer

CAS 152261-33-1

M.W 3000-4000

STRUCTURE

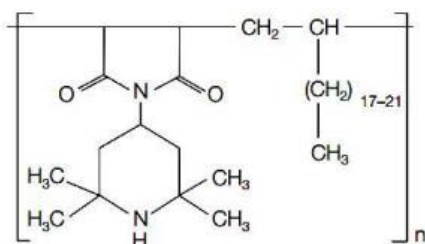

### SPECIFICATION AND PHYSICAL PROPERTIES

TEST	UNIT	SPECIFICATION
APPEARANCE		YELLOWISH SOLID
MELTING POINT	°C	95.00-125.00
SOLUBILITY IN TOLUENE		OK
LOSS ON DRYING	%	0.8MAX
TGA (290°C)	%	10MAX

### FEATURE AND APPLICATION

\*JADEWIN UV5050H can be used for all polypropylene, especially for water-cooled, line products, with a film of PPA and titanium dioxide and agricultural products.It also applies to PVC, PA, TPU, and ABS, PET material.

\*For more information, please refer to the technical safety instructions.

### PACKING

20Kg Carton

### STORAGE



Keep container tightly closed and dry and storage in cool place

## CHEMICAL INVENTORIES

Australia - AICS  
Canada - DSL  
EU - EINECS  
China - IECSC  
Japan - ENCS  
Korea - ECL  
USA - TSCA  
Philippines - PICCS